

The
STRONG



The Strength To Guarantee Your Confidence

2012-2013 **SUNLINE**

FISHING LINE CATALOG

Sunline's technology for more aggressive fishing action

- Sunline led the industry in displaying line strength on the label. We believe this is the least a manufacturer can do to be accountable to the consumer in terms of quality assurance. Also, in practical terms, line strength is also the single most important piece of information for product selection.
- Sunline strives to broaden the possibilities of fishing by offering a wide selection of fishing line to support all kinds of fishing techniques for all species of fish.
- Sunline pursues the highest quality in line manufacture, from R&D on chemical and resin processing technologies to quality management techniques.

Nylon Line Polyamide monofilament

Soft, supple, and easy to handle, nylon is an all-around material that suits any situation, outperforming fluorocarbon in both straight and knot strength. The flexibility of the material makes it spool easily and snugly onto the reel, and the line stretches just enough to absorb any sudden shocks. Because nylon is more absorbent than other materials, the line should be replaced occasionally to enjoy maximum performance. It is the line of choice for all anglers, from beginner to championship level.

- Sinking speed (specific gravity): 1.14 (some variation depending on the type of nylon)
- Moisture absorption: Yes (diameter and stretch increase with water absorption)
- Flexibility: Soft
- Stretch (amount of stretch at breaking point): Yes (moderate stretch absorbs shock. High initial stretch.)
- Abrasion resistance: Soft surface is vulnerable to scratches and damage.
- Straight strength: Strong
- Knot strength: Approx. 85% of straight strength
- Refractive index: 1.53

Fluorocarbon Line Polyvinylidene fluoride monofilament

While slightly lower in strength compared to nylon, the exceptional abrasion resistance of fluorocarbon makes it all but impervious to damage from wear, making for an incredibly durable line. The low initial stretch allows for good sensitivity, while like nylon, there is just enough stretch to absorb shock. The hardness of the material may take some getting used to.

- Sinking speed (specific gravity): 1.78 (fast sinking speed.)
- Moisture absorption: No
- Flexibility: Hard
- Stretch (amount of stretch at breaking point): Yes (slightly less stretch than nylon. Low initial stretch means better sensitivity.)
- Abrasion resistance: Hard surface is resistant to scratches and damage.
- Straight strength: Strong
- Knot strength: Approx. 70% of straight strength
- Refractive index: 1.42 (nearly invisible in water due to the refractive index being close to that of water (1.33)).

Braided Line

Super PE Polyethylene multifilament

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No
- Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction.
- Straight strength: Approx. 2.5 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HG - PE Polyethylene multifilament

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No
- Flexibility: Supple (stiffer than Super PE)
- Stretch (amount of stretch at breaking point): Minimal (slightly more stretch than Super PE)
- Abrasion resistance: Ultrathin filaments are easily damaged by friction (slightly weaker than Super PE)
- Straight strength: Approx. 3.5 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HG-PE type II Polyethylene multifilament + polyester line

- Sinking speed (specific gravity): 1.05
- Moisture absorption: No
- Flexibility: Supple (more supple than HG-PE)
- Stretch (amount of stretch at breaking point): Minimal (slightly less stretch than HG-PE)
- Abrasion resistance: Ultrathin filaments are easily damaged by friction (slightly stronger than HG-PE)
- Straight strength: Approx. 3.2 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HG-PE type III Polyethylene multifilament + fluorocarbon line

- Sinking speed (specific gravity): 1.08
- Moisture absorption: No
- Flexibility: Supple (more supple than Type II)
- Stretch (amount of stretch at breaking point): Minimal (slightly less stretch than Type II)
- Abrasion resistance: Ultrathin filaments are easily damaged by friction (slightly stronger than HG-PE)
- Straight strength: Approx. 3.4 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

Manufacturing and processing technologies



High Molecular Weight Nylon

Newly developed nylon with even higher molecular weight than our conventional ultra-strength nylon. High levels of straight and knot strength. High performance nylon line that's exceptionally durable, very manageable, with low memory.

ULS (Unresisting Line Shape) Nylon



While identical to regular nylon in terms of basic properties, the surface of this new grade nylon is given a microscopic dimpling configuration to minimize guide friction, lengthening casting distance, and improving abrasion resistance.

UV-Resistant process



Maximum protection against UV damage for vulnerable nylon lines.

Super Dynamic Processing



Uncompromising design with a focus on tenacity, the index of strength and stretch. This new manufacturing technique imparts the line with the energy to endure to the limit. An exquisite balance of strength and stretch to deliver the toughness needed in real life angling situations.

Vivid Dyeing II process



Taking our unique VID technology a step further, this two-stage dyeing technique imparts the ultimate in color expression. The color changes depending on the angle and direction of sunlight.

Vivid Dyeing process



Sunline's unique dyeing technology – vividness, visibility, and softness in one.

Specifications



Parallel spooling

A spooling system which minimizes curling and surface indentation. Feel the difference as the line comes off the spool nice and straight and very smooth.

Quartet Resin Processing



The next evolution in resin processing: Quad layer resin processing "Quartet Resin Processing" is the next step in the evolution of our proven Triple Resin Processing Technology. A wide variety of resin processes can deliver the ultimate in line quality.

Triple Resin Processing



Retains its strength and suppleness even when knotted "Triple Resin Processing" is a unique process that fills in the spaces between the molecules with resin. As a result, the line is moisture proof, very slick, and resistant to shock and wear.

Multifunctional Resin Processing



A combination of multifunctional patterns, this processing method adds concept-appropriate function and enhances actual performance.

Double Resin Processing



Enhanced performance with double layer processing In "Double Resin Processing," a double coat of various high-performance resins results in a highly competent line.

Single Resin Processing




Advanced performance and reliability A single coat of multi-purpose resin to enhance the quality of the original line.




Non-stress spooling

Tension-free spooling maximizes the qualities of the line. Because no stress is placed on the line as it is spooled, the line comes off ready to deliver superior stretch performance.

USC Nylon: Ultra high molecular weight microsilicone and high strength melt-compounded nylon.

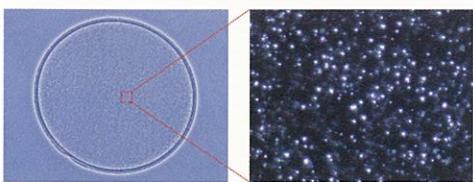

Ultra high molecular weight microsilicone + high strength melt-compounded nylon 200% improvement in abrasion resistance (company data). High slickness for easy handling, allowing the angler's skills to shine!

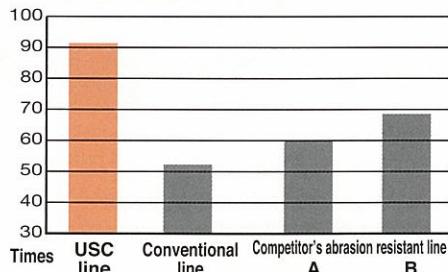

The ultimate high molecular weight silicone compounded nylon line, Sunline's original technology perfected after 10 years of development. Using specialized technology, ultra high molecular weight silicone (MW 500000) is micro-diffused within the nylon matrix, resulting in a substantial improvement in the drawbacks of nylon: abrasion resistance and moisture absorption.



Iso Special Technician Type TC



●Color : Silky White



Iso Special Technician Type TC-M



●Color Pattern : Silky White / Pink / Yellow / Orange
Silky White Black Pink Yellow Orange Black Silky White
210cm 5cm 10cm 10cm 10cm 5cm 210cm

Iso Special Technician Hi-Color Type TC-H



●Color : Pearl Yellow Green



- Super abrasion resistance for fishing around rocky ledges and shoals.
- High slickness dramatically reduces guide friction for smooth, easy long-distance casting and great cast control.
- The line is easy to handle, enabling you to drop your rig with pinpoint accuracy in that promising tide. Responds aggressively to striking.
- Exclusive UV-R processing minimizes UV damage.
- The fibers are designed specifically for each line weight, making the line even easier to handle.

Iso Special Technician Type TC, TC-H, TC-M Length : 150m

Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285	0.330	0.370	0.405
Strength(lb)	6	7	8	10	12	16	20	25
Line Size(#)	1.5	1.75	2	2.5	3	4	5	6
Line quality	Hard	Medium Hard	Medium	Medium Soft				



New Released

Iso Special Technician Spotted Knifejaw

Makes your ultimate dream come true! USC line for spotted knifejaw! Designed specifically for this target game!

- USC nylon fused with super high molecular weight silicone. Dramatic improvement in abrasion resistance and casting distance.
- Strong yet tenacious, able to withstand vigorous fights with barred and spotted knifejaws.
- Lays nicely on the reel. Low memory. Trouble-free, easy handling line.
- High sensitivity to convey the slightest change in bottom configuration. Perfect stretch for just the right give to the bite.
- Original stickers (200m, 150m, 100m) to let you know the remaining line length (except for 600m and #35 of 300m).



Length : 300m / 600m ●Color : Black

Standard Dia.(mm)	0.660	0.700	0.740	0.780	0.810	0.855	0.910	0.980
Line Size(#)	16	18	20	22	24	27	30	35

Length : 300m / 600m ●Color : Orange

Standard Dia.(mm)	0.660	0.700	0.740	0.780	0.810
Line Size(#)	16	18	20	22	24



Unbelievable abrasion resistance! Troutist USC

Length : 100m ●Color : Natural pearl brown

Standard Dia.(mm)	0.128	0.138	0.148	0.165	0.190	0.205
Strength(lb)	2	2.5	3	4	5	6
Line Size(#)	0.6	0.7	0.8	1	1.25	1.5

Length : 150m ●Color : Natural pearl brown

Standard Dia.(mm)	0.235	0.260	0.285
Strength(lb)	8	10	12
Line Size(#)	2	2.5	3

I.G.F.A. rated line for tournament fishing!

Siglon V



- The spaces between the nylon molecules are filled with resin in a new resin reinforcement process to produce a hydrophobic line which retains its strength and limpness: a tremendous advantage in tournament fishing.
- UV resistant processing makes the line impervious to weakening or degradation due to sunlight.
- I.G.F.A. rated for incomparable strength to withstand aggressive pulling and shock.

Length : 30m connected spools ● Color : Mist Green

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260
Strength(kg)	1	1.5	2	3	3.5	4	5	6

Length : 100m connected spools ● Color : Clear / Mist Green

Standard Dia.(mm)	0.063	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	0.5	1	1.5	2	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24

Length : 100m×2 connected spools ● Color : Clear

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	1	1.5	2	3	3.5	4	5	6	7	8	10	12	15	17	19	24

Length : 100m single spool ● Color : Clear / Mist Green

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	1	1.5	2	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24

Length : 150m single spool ● Color : Mist Green

Standard Dia.(mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.370	0.405
Strength(kg)	3	3.5	4	5	6	7	7.5	10	12

Length : 300m single spool ● Color : Clear / Mist Green

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	1	1.5	2	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24

Length : 600m single spool ● Color : Clear / Mist Green

Standard Dia.(mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570	0.620	0.660	0.700	0.740
Strength(kg)	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24	28	32	37	40

Length : 2000m single spool ● Color : Clear / Mist Green

Standard Dia.(mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24

Length : 5000m single spool ● Color : Clear / Mist Green

Standard Dia.(mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	3	3.5	4	5	6	7	7.5	8	10	12	15	17	19	24

Length : 220m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	6 - 35	6 - 50	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12	5 - 12

ULS Unresisting Line Shape VID



Length : 220m ● Color : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	6 - 35	6 - 50	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12	5 - 12

Length : 75m(15m×5)

Standard Dia.(mm)	0.165 - 0.520	0.205 - 0.570	0.235 - 0.470	0.235 - 0.570	0.265 - 0.620	0.260 - 0.570
Strength(lb)	4 - 40	6 - 50	8 - 35	8 - 50	8 - 60	10 - 50
Line Size(#)	1 - 10*	1.5 - 12*	2 - 8*	2 - 12*	2.5 - 12	2.5 - 12

Length : 75m(15m×5)

Standard Dia.(mm)	0.285 - 0.470	0.285 - 0.570	0.285 - 0.660	0.330 - 0.570	0.370 - 0.570
Strength(lb)	12 - 35	12 - 50	12 - 70	16 - 50	20 - 50
Line Size(#)	3 - 8*	3 - 12*	3 - 16	4 - 12*	5 - 12*

Length : 75m(15m×5)

Standard Dia.(mm)	0.165 - 0.520	0.205 - 0.570	0.235 - 0.470	0.235 - 0.570	0.265 - 0.620	0.260 - 0.570
Strength(lb)	4 - 40	6 - 50	8 - 35	8 - 50	8 - 60	10 - 50
Line Size(#)	1 - 10*	1.5 - 12*	2 - 8*	2 - 12*	2.5 - 12	2.5 - 12

Length : 75m(15m×5)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.470	0.235 - 0.570	0.265 - 0.620	0.260 - 0.570
-------------------	---------------	---------------	---------------	---------------	---------------	---------------



Fluorescent Orange



Clear Blue

Siglon F

Dependable SIGLON resin processing in a fluorescent line!



- Unique resin reinforcement process for a moisture-proof, curl-free, strong, and shock-resistant line.
- The spaces between the nylon molecules are filled with resin.
- A special technique also prevents the fluorescent color from fading.
- UV resistant processing to maintain strength and flexibility over prolonged and repeated use.

Length : 100m / 300m / 600m ● Color : Clear blue / Fluorescent Pink / Fluorescent Orange / Fluorescent Blue

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.205	0.235	0.260	0.285
Strength(kg)	0.7	1	1.5	2	3	4	5	5.5
Standard Dia.(mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	6	7	9	11.5	12	14	18	20
Standard Dia.(mm)	0.620	0.660	0.700	0.740				
Strength(kg)	23	27	32	37				

Length : 100m / 300m / 600m / 1000m ● Color : Clear / Brown

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.205	0.235	0.260	0.285
Strength(kg)	0.7	1	1.5	2	3	4	5	5.5
Standard Dia.(mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	6	7	9	11.5	12	14	18	20
Standard Dia.(mm)	0.620	0.660	0.700	0.740				
Strength(kg)	23	27	32	37				

All-round versatile line. Siglon



Length : 100m / 300m / 600m / 1000m ● Color : Clear / Brown

Standard Dia.(mm)	0.104	0.128	0.148	0.165	0.205	0.235	0.260	0.285
Strength(kg)	0.7	1	1.5	2	3	4	5	5.5
Standard Dia.(mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(kg)	6	7	9	11.5	12	14	18	20
Standard Dia.(mm)	0.620	0.660	0.700	0.740				
Strength(kg)	23	27	32	37				



Brown

Siglon Sea



Length : 300m ● Color : Clear

● Standard Dia.(mm) : 0.157 - 0.595 ● Line Size(#): 0.8 - 12

Length : 600m ● Color : Clear

● Standard Dia.(mm) : 0.310 - 0.780 ● Line Size(#): 3.5 - 22

Siglon Carp

This is it! Go get that monster carp!



- Super strong, super abrasion resistant, high durability line, specifically designed for wild carp.
- Original SRP processing for good line lay, excellent stretch, and low memory. Great for repeated casting.
- Special copolymer nylon for high strength and low moisture absorption. Stands up to the power and stamina of trophy carp.
- Original UV-R process minimizes weakening and UV damage.

Length : 300m / 1000m ● Color : Matte Green / Matte Red Brown

Standard Dia.(mm)	0.280	0.300	0.330	0.350	0.380	0.410
Strength(kg)	5.5	6.2	7.4	8.2	9.5	11.0



Matte Green



Matte Red Brown

Siglon Dynamic



Length : 100m / 300m ● Color : Gold Brown

● Standard Dia.(mm) : 0.212 - 0.417

● Strength(lb) : 7.7 - 23.8

● Line Size(#): 1.5 - 6



Siglon ICE



Length : 50m ● Color : Fluorescent Red / Black / Clear

● Standard Dia.(mm) : 0.104 - 0.260

● Line Size(#): 0.4 - 2.5



Clear

Siglon Knotless Tapered Leader

Length : 7.5ft / 9ft / 12ft ● Color : Mist Green / Brown

● Strength(lb) : 2 - 15 ● Line Size : 7X - 0X



Siglon Tippet



Length : 30m

● Color : Clear / Mist Green

● Strength(lb) : 1 - 15 ● Line Size : 8X - 0X



Mist Green

Saltwater Special System Shock Leader Nylon

Tenacious and rugged, for landing the big game: SHOCK LEADER.



Length : 50m ● Color : Natural Clear

Standard Dia.(mm)	0.285	0.330	0.370	0.405	0.435	0.470	0.520	0.570	0.620	0.660	0.700	0.740	0.810	0.910	1.040
Strength(lb)	12	16	20	25	30	35	40	50	60	70	80	90	100	130	150
Line Size(#)	3	4	5	6	7	8	10	12	14	16	18	20	24	30	40

Saltwater Special Pocket Shock Leader Nylon

Super high strength nylon shock leader.



Length : 30m ● Color : Natural Clear

Standard Dia.(mm)	0.285	0.330	0.370	0.405
Strength(lb)	12	16	20	25
Line Size(#)	3	4	5	6

Length : 20m ● Color : Natural Clear

Standard Dia.(mm)	0.435	0.470	0.520
Strength(lb)	30	35	40
Line Size(#)	7	8	10



Saltwater Special Taper Shock Leader Nylon Easy knotting.


Length : 3.5m ● Color : Natural Clear

Standard Dia.(mm)	0.205 - 0.330	0.235 - 0.370	0.260 - 0.405	0.285 - 0.435	0.330 - 0.470	0.330 - 0.520	0.370 - 0.570	0.405 - 0.620	0.435 - 0.660
Strength(lb)	6 - 16	8 - 20	10 - 25	12 - 30	14 - 35	16 - 40	20 - 50	25 - 60	30 - 70
Line Size(#)	1.5 - 4	2 - 5	2.5 - 6	3 - 7	3.5 - 8	4 - 10	5 - 12	6 - 14	7 - 16



Super Cast NAGE

Vivid color rotation every 25 meters.



Length : 200m / 1000m ● Color : Clear Blue / Red / Yellow / Blue


Standard Dia.(mm)	0.205	0.235	0.285	0.330	0.370	0.405
Strength(lb)	6	8	12	16	20	25
Line Size(#)	1.5	2	3	4	5	6

Length : 200m / 1000m ● Color : Clear Blue / Red / Yellow / Blue

Standard Dia.(mm)	0.205	0.235	0.285	0.330	0.370	0.405
Strength(lb)	6	8	12	16	20	25
Line Size(#)	1.5	2	3	4	5	6

Super Cast Tapered Line

Vivid color rotation every 25 meters. Built-in taper for excellent manageability in this surf casting line.



Length : 170m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12	5 - 12

Length : 220m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	6 - 35	6 - 50	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12



Length : 170m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12

Length : 220m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	6 - 35	6 - 50	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12

Length : 170m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12

Length : 220m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.205 - 0.470	0.205 - 0.570	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	6 - 35	6 - 50	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12	4 - 12

Length : 170m ● Color Pattern : Red / Yellow / Blue (Clear Blue in taper section)

Standard Dia.(mm)	0.235 - 0.470	0.235 - 0.570	0.260 - 0.570	0.285 - 0.470	0.285 - 0.570	0.330 - 0.570	0.370 - 0.570
Strength(lb)	8 - 35	8 - 50	10 - 50	12 - 35	12 - 50	16 - 50	20 - 50
Line Size(#)	1.5 - 8	1.5 - 12	2 - 8	2 - 12	2.5 - 12	3 - 8	3 - 12



Iso Special Tournament Muslard

Muscle Line for the Tournament Circuit!

- High molecular weight nylon for the highest level of strength and tenacity in the Iso Special Series.
- Hard line design for easy rigging and line mending.
- Double Resin Processing for high water repellency. Minimizes that annoying clinging and sticking to the rod and lets the line slide through the guides smoothly.
- Shiny pink color for excellent visibility (VID processing).
- Size offerings in even numbered intervals for successful, aggressive angling.

HMW **DAP**

UV-R **VID**



Length : 150m	●Color : Shinny Pink
Standard Dia.(mm)	0.200 0.210 0.225 0.235 0.245 0.255 0.277 0.285
Strength(lb)	5.5 6.5 7.5 8 9 9.5 11 12
Line Size(#)	1.4 1.6 1.8 2 2.2 2.4 2.8 3

Iso Special Dynard

Now even higher strength! High molecular weight nylon main line!

- First in the industry: High molecular weight nylon for high-level straight and knot strength.
- "Marine gold" color for easy visibility in the air and underwater. Advanced color function on the reel, too.
- Multiple resin processing with 70 cm water repellent + 30 cm hydrophilic resin allows the line to drift with the tide and remain suspended in the water, letting you mend your line without stressing your rig or bobber.
- Pound test-specific line texture design. The lighter weights have a hard finish, while the thicker lines are softer, for the highest degree of manageability.



HMW

MMP

UV-R



Length : 150m ●Color : Marine Gold

Standard Dia.(mm)	0.195	0.205	0.219	0.235	0.260	0.285	0.330	0.370	0.405
Strength(lb)	5.5	6	7	8	10	12	16	20	25
Line Size(#)	1.35	1.5	1.75	2	2.5	3	4	5	6
Line quality		Hard	Medium	Medium Soft					



Neon
release

Iso Special Visible Mark-E

All weather, high visibility line!

DAP **UV-R** **VID** **Tide**

- Highly visible coloring, with black markings between colors for even more vivid visibility.
- Marks are highly visible in all weather situations: Back lighting, front lighting, cloudy, sunny, morning, dusk – always easy to identify the course of the line.
- VID processing minimizes fading and greatly improves durability.
- Double Resin Processing for excellent slickness and smooth knotting. Excellent water repellency for easy handling.
- Just the right balance between sinking and floating – drifts just below the water surface for minimal interference of wind and waves while avoiding sunken weeds and roots. Lets you run your rig true to the tide.

Length : 150m ●Color : White / Exciting Orange / Vivid Green with Black markings

Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285	0.330	0.370	0.405
Strength(lb)	6	7	8	10	12	16	20	25
Line Size(#)	1.5	1.75	2	2.5	3	4	5	6

White	Black	Exciting Orange	Black	Vivid Green	Black
-140cm-	4cm	20cm	2cm	20cm	4cm

140cm - 4cm - 20cm - 2cm - 20cm - 4cm - 190cm



Iso Special Fine Float Type FF

Totally natural! Fingertip control! Effortless floating!

Length : 100m ●Color : Vivid Yellow

Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285	0.330
Strength(lb)	6	7	8	10	12	16
Line Size(#)	1.5	1.75	2	2.5	3	4

Length : 150m ●Color : Vivid Yellow

Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285	0.330	0.370
Strength(lb)	6	7	8	10	12	16	20
Line Size(#)	1.5	1.75	2	2.5	3	4	5

Tide **UV-R** **Float** **NSS**

Standard Dia.(mm)	0.285	0.330	0.370	0.405
Strength(lb)	12	16	20	25
Line Size(#)	3	4	5	6



Super Z

Highly balanced, economy line.

SRP

Length : 50m ●Color : Natural Clear

Standard Dia.(mm)	0.090	0.104	0.117	0.128	0.148	0.165	0.205	0.235	0.260	0.285	0.330	0.370	0.405
Strength(lb)	0.8	1	1.5	2	3	4	6	8	10	12	16	20	25
Line Size(#)	0.3	0.4	0.5	0.6	0.8	1	1.5	2	2.5	3	4	5	6



FC Sniper The next evolution of fluorocarbon.

- Manufactured with the newly developed high molecular weight fluorocarbon. High levels of tensile and knot strength made possible by exceptional technology. Parallel spooling keeps the line from flattening.
- Now, with dramatically higher abrasion resistance-even stronger against surface damage than our conventional product.
- TRP processing with new, special resins to resist mud and dirt from sticking to the line.
- Quantum improvement in straightness-expect to get even more casting distance.
- Pound test-specific line texture design. Strength is paramount for 2-6 lb, while lay on the reel and castability are the priorities for 7-12 lb. For 13 lb and over, sensitivity and abrasion resistance are emphasized for pitching with the Texas rig or rubber jig.
- 150 m spools with practical marking at the 75 m point (18-30 lb are 100 m spools marked at the 50 m point).



Length : 150m ● Color : Natural Clear


Standard Dia.(mm)	0.128	0.138	0.148	0.157	0.165	0.175	0.190	0.205	0.219	0.235	0.260	0.285	0.300	0.310	0.330
Strength(lb)	2	2.5	3	3.5	4	4.5	5	6	7	8	10	12	13	14	16
Line Size(#)	0.6	0.7	0.8	0.9	1	1.15	1.25	1.5	1.75	2	2.5	3	3.25	3.5	4

Length : 300m ● Color : Natural Clear

Standard Dia.(mm)	0.128	0.138	0.148	0.157	0.165	0.175	0.190	0.205	0.219	0.235	0.260	0.285	0.300	0.310	0.330	0.350	0.370	0.380	0.405	0.435
Strength(lb)	2	2.5	3	3.5	4	4.5	5	6	7	8	10	12	13	14	16	18	20	22	25	30
Line Size(#)	0.6	0.7	0.8	0.9	1	1.15	1.25	1.5	1.75	2	2.5	3	3.25	3.5	4	4.5	5	5.5	6	7

FC Sniper BMS The aggressively evolved Bite Marker System

- Manufactured with the newly developed high molecular weight fluorocarbon. High levels of tensile and knot strength made possible by exceptional technology. Parallel spooling keeps the line from flattening.
- Our exclusive new special dyeing technology for even sharper delineation between the marker colors.
- Gives you an accurate read of minute changes in the line-makes all the difference with no-sinker rigs and in deep areas.
- Quantum improvement in straightness-expect to get even more casting distance.
- Pound test-specific line texture design. Strength is paramount for 2-6 lb, while lay on the reel and castability are the priorities for 7-12 lb. For 14 lb and over, sensitivity and abrasion resistance are emphasized for pitching with the Texas rig or rubber jig.



Length : 150m ● Color Pattern : Natural Clear / Orange / Pink

Standard Dia.(mm)	0.128	0.138	0.148	0.157	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.310	0.330
Strength(lb)	2	2.5	3	3.5	4	5	6	7	8	10	12	14	16
Line Size(#)	0.6	0.7	0.8	0.9	1	1.25	1.5	1.75	2	2.5	3	3.5	4

Length : 300m ● Color Pattern : Natural Clear / Orange / Pink

Standard Dia.(mm)	0.128	0.138	0.148	0.157	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435
Strength(lb)	2	2.5	3	3.5	4	5	6	7	8	10	12	14	16	20	25	30
Line Size(#)	0.6	0.7	0.8	0.9	1	1.25	1.5	1.75	2	2.5	3	3.5	4	5	6	7

FC Lake Biwa Guide Special

Soft fluoro line specifically designed for Big Bass! Great for spinning!

Length : 100m ● Color : Natural Clear

Standard Dia.(mm)	0.205	0.219	0.235
Strength(lb)	6	7	8
Line Size(#)	1.5	1.75	2




Shooter Metan Invisible

Camouflage line for high-pressure fishing.

Length : 100m ● Color Pattern : Brown / Green / Dark Gray

Standard Dia.(mm)	0.128	0.148	0.157	0.165	0.175	0.190	0.205
Strength(lb)	2	3	3.5	4	4.5	5	6
Line Size(#)	0.6	0.8	0.9	1	1.15	1.25	1.5

Standard Dia.(mm)	0.128	0.148	0.157	0.165	0.175	0.190	0.205
Strength(lb)	2	3	3.5	4	4.5	5	6
Line Size(#)	0.6	0.8	0.9	1	1.15	1.25	1.5




Shooter Metan Green

Blends in with the green color of weeds, moss, and reservoir water.
A new concept line which eliminates the spook factor in bass fishing.

Length : 100m ● Color Pattern : Deep Green / Spring Green / Bright Green

Standard Dia.(mm)	0.165	0.175	0.190	0.205	0.235	0.260	0.285	0.310	0.330
Strength(lb)	4	4.5	5	6	8	10	12	14	16
Line Size(#)	1	1.15	1.25	1.5	2	2.5	3	3.5	4

Standard Dia.(mm)	0.165	0.175	0.190	0.205	0.235	0.260	0.285	0.310	0.330
Strength(lb)	4	4.5	5	6	8	10	12	14	16
Line Size(#)	1	1.15	1.25	1.5	2	2.5	3	3.5	4

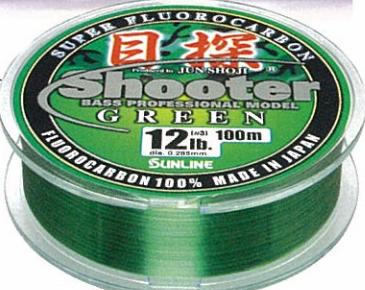

Length : 75m ● Color Pattern : Deep Green / Spring Green / Bright Green

Standard Dia.(mm)	0.165	0.175	0.190	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435
Strength(lb)	4	4.5	5	6	8	10	12	14	16	20	25	30
Line Size(#)	1	1.15	1.25	1.5	2	2.5	3	3.5	4	5	6	7

Standard Dia.(mm)	0.165	0.175	0.190	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435
Strength(lb)	4	4.5	5	6	8	10	12	14	16	20	25	30
Line Size(#)	1	1.15	1.25	1.5	2	2.5	3	3.5	4	5	6	7

Length : 100m ● Color : Natural Clear

Standard Dia.(mm)	0.165	0.175	0.190	0.205	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.4
-------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-----

New Release

Dunk Sniper II

For aggressive squid fishing! Lets you control your live bait to get the bite.



- Fluorocarbon line developed specifically for aggressive squid fishing with live bait. Lets you control your live bait (horse mackerel) exactly as you want.
- Incorporates the popular Count Meter 10, with new, vivid coloring by VID processing. Now it's easy to see exactly where your line is, in the air or in the water. Expect bigger catches!
- Better manageability, tensile strength, and knot strength to accommodate more refined techniques.
- Line quality made possible only by Sunline's technology. The smallest movement by your live bait is instantly conveyed to your rod tip.
- Double Resin Processing for better durability and slickness. Easy to cast even the most lightweight of rigs.

Reel Side				Rig Side
9.5m Pink	9.5m Yellow Green	9.5m Orange		
Length : 180m	●Color : Pink & Yellow Green & Orange	Length : 150m	●Color : Pink & Yellow Green & Orange	
Standard Dia.(mm)	0.165 0.190 0.205	Standard Dia.(mm)	0.219 0.235 0.260	
Strength(lb)	4 5 6	Strength(lb)	7 8 10	
Line Size(#)	1 1.25 1.5	Line Size(#)	1.75 2 2.5	



Saltwater Special Small Game FC

Pier fishing fluorocarbon line for dropshotting or long distance casting.

Length : 150m ●Color : Natural Clear

Standard Dia.(mm)	0.104	0.117	0.128	0.138	0.148	0.157	0.165
Strength(lb)	1	1.5	2	2.5	3	3.5	4
Line Size(#)	0.4	0.5	0.6	0.7	0.8	0.9	1



Saltwater Special System Shock Leader FC

High sensitivity, high abrasion resistance fluorocarbon leader.

- Parallel spooling for low memory and slicker surface. Line spools out smoothly, with great linearity.
- Balanced, high strength design throughout the lineup: Thinner diameters are formulated with tougher material to withstand abrasion from structure and fish teeth, while thicker diameters are designed for suppleness to keep control of jig movement.
- Triple Resin Processing for outstanding resistance to abrasion and friction. A more truly circular profile for perfect knots, even with PE lines.

Length : 100m ●Color : Natural Clear

Standard Dia.(mm)	0.285	0.330	0.370	0.435	0.470	0.520	0.570	0.620
Strength(lb)	12	16	20	25	30	35	40	50
Line Size(#)	3	4	5	7	8	10	12	14

Length : 30m ●Color : Natural Clear

Standard Dia.(mm)	0.700	0.740	0.780	0.910
Strength(lb)	60	70	80	100
Line Size(#)	18	20	22	30



Saltwater Special System Leader FC100

Fluorocarbon shock leader for super PE lines

Length : 30m / 100m ●Color : Natural Clear

Standard Dia.(mm)	0.330	0.405	0.470	0.520	0.570	0.620	0.660	0.700	0.740	0.780	0.810	0.840	0.870	0.910
Strength(lb)	16	20	30	35	40	45	50	55	60	65	70	80	90	100
Line Size(#)	4	6	8	10	12	14	16	18	20	22	24	26	28	30



Saltwater Special Small Game Leader FC

Soft and stealthy approach – the fish won't see it coming.

Length : 30m ●Color : Stealth gray

Standard Dia.(mm)	0.148	0.165	0.190	0.205
Strength(lb)	3	4	5	6
Line Size(#)	0.8	1	1.25	1.5



Saltwater Special Pocket Shock Leader FC

Supple, high sensitivity fluorocarbon shock leader.

Length : 30m ●Color : Natural Clear

Standard Dia.(mm)	0.285	0.330	0.370	0.405
Strength(lb)	12	16	20	25
Line Size(#)	3	4	5	6

Length : 20m ●Color : Natural Clear

Standard Dia.(mm)	0.435	0.470	0.520
Strength(lb)	30	35	40
Line Size(#)	7	8	10



Saltwater Special Egi Leader FC

Exceptional strength and abrasion resistance - impervious to rocks and roots. 100% Fluorocarbon Egi leader.

Length : 30m ●Color : Natural Clear

Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285
Strength(lb)	6	7	8	10	12
Line Size(#)	1.5	1.75	2	2.5	3



Saltwater Special Egi Leader SV-I

Pink color for heavily fished areas! Lets you sneak up on your target! 100% Fluorocarbon Egi leader.



Standard Dia.(mm)	0.205	0.219	0.235	0.260	0.285
Strength(lb)	6	7	8	10	12
Line Size(#)	1.5	1.75	2	2.5	3



Tornado Kong Draws in the bite! Supple fluoro!

- Highly supple, soft type fluorocarbon leader encourages fish to BITE! Can adapt to unexpected strikes and pulls from big ones.
- Soft but not too soft – can drift with the most complex of tides, achieving the ideal tension of a leader.
- Triple Resin Processing for better abrasion resistance against rocks and roots.

Length : 60m ●Color : Natural Clear

Standard Dia.(mm)	0.128	0.148	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(lb)	2	3	4	5	6	7	8	10	12	14	16	20	25	30	35	40	50
Line Size(#)	0.6	0.8	1	1.25	1.5	1.75	2	2.5	3	3.5	4	5	6	7	8	10	12

Length : 50m ●Color : Natural Clear

Standard Dia.(mm)	0.330	0.370
Strength(lb)	16	20
Line Size(#)	4	5

Length : 30m ●Color : Natural Clear

Standard Dia.(mm)	0.405	0.435	0.470	0.520	0.570
Strength(lb)	25	30	35	40	50
Line Size(#)	6	7	8	10	12



V Hard The strongest Tornado in history! An incredible 30% improvement in strength!!

- High uniformity minimizes glare in the water, allowing you to sneak up on the most wary of fish. Excellent straightness lets you control your line and tie knots with ease.
- Unbelievably strong, straight or knotted: Both 30% stronger.
- Our exclusive Hard Protect Resin Processing for a supple, yet abrasion resistant, super-hard finish.
- Retains its transparency for long periods underwater, giving you a longer time to stalk your target.



Length : 50m ●Color : Natural Clear

Standard Dia.(mm)	0.128	0.148	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength(lb)	2	3	4	5	6	7	8	10	12	14	16	20	25	30	35	40	50
Line Size(#)	0.6	0.8	1	1.25	1.5	1.75	2	2.5	3	3.5	4	5	6	7	8	10	12

Length : 100m ●Color : Natural Clear

Standard Dia.(mm)	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470
Strength(lb)	8	10	12	14	16	20	25	30	35
Line Size(#)	2	2.5	3	3.5	4	5	6	7	8

SV-I Pink color is difficult for fish to see.

Length : 50m ●Color : Pink

●Standard Dia.(mm) : 0.148 - 0.330	●Strength(lb) : 3 - 16
●Line Size(#)	0.8 - 4

Length : 100m ●Color : Pink

●Standard Dia.(mm) : 0.135 - 0.520	●Strength(lb) : 6 - 40
●Line Size(#)	2 - 10



Basic FC

Basic fluorocarbon line for every conceivable kind of fishing.

Length : 300m / 225m(#4,#5) ●Color : Natural Clear

●Standard Dia.(mm) : 0.128 - 0.370	●Strength(lb) : 2 - 20	●Line Size(#)	0.6 - 5
------------------------------------	------------------------	---------------	---------



Siglon Fluorocarbon

Length : 100m / 2000m

Standard Dia.(mm)	0.225	0.265	0.290	0.310	0.330	0.350	0.380	0.415	0.445
Strength(lb)	7.9	10.3	12.8	13.6	15.4	17.8	20.0	24.2	26.0
Line Size(#)	1.5	2	2.5	3	3.5	4	5	6	7

Length : 200m / 275m

Standard Dia.(mm)	0.140	0.160	0.180	0.200	0.225	0.265	0.290	0.310	0.330
Strength(lb)	3.1	4.0	4.8	6.2	7.9	10.3	12.8	13.6	15.4
Line Size(#)	0.6	0.8	1	1.25	1.5	2	2.5	3	3.5

Standard Dia.(mm)	0.350	0.380	0.415	0.445
Strength(lb)	17.8	20.0	24.2	26.0

●Color : Clear



Siglon FC

Length : 30m ●Color : Clear

●Standard Dia.(mm) : 0.140 - 0.350	●Strength(lb) : 3 - 18	●Line Size(#)	0.6 - 4
------------------------------------	------------------------	---------------	---------

Length : 50m ●Color : Clear

●Standard Dia.(mm) : 0.140 - 0.600	●Strength(lb) : 3 - 40	●Line Size(#)	0.6 - 12
------------------------------------	------------------------	---------------	----------





Saltwater Special Small Game PE HG - PE

Instantaneous feedback of the lightest hit! High sensitivity, high strength, high grade polyethylene braid!

- 150 m spool for long casting of split shot and Carolina rigs.
- High sensitivity design for precise monitoring of the bottom situation as well as instant feedback of the most subtle hit for effective hooking.
- Works well with high sensitivity rods. Ultra-thin design gives you outstanding casting performance and manageability.
- High strength, high grade polyethylene braid can handle big game, too.
- Excellent visibility lets you enjoy the game day and night.

Length : 150m	●Color : Cherry blossom pink	
Strength(lb)	6	8
Line Size(#)	0.3	0.4




Saltwater Special Rock Fish PE HG - PE

For the high-level angler who wants to get the most out of the rock fishing game!

- Bright orange color for outstanding visibility, ideal for nighttime fishing.
- Super high sensitivity, super low stretch design to capture the most delicate of bites. Gives you accurate feedback of what's going on at the bottom.
- Low specific gravity (0.97) for stress-free casting of even super lightweight lures. Outstanding compatibility with float fishing rigs.
- Super high strength PE for complete confidence with big rock fish.
- Short braided manufacturing process for toughness – resists abrasion from rocks, reefs, concrete tetrapods, and weeds.


Length : 120m	●Color : Bright Orange		
Strength(lb)	6	8	10
Line Size(#)	0.3	0.4	0.6

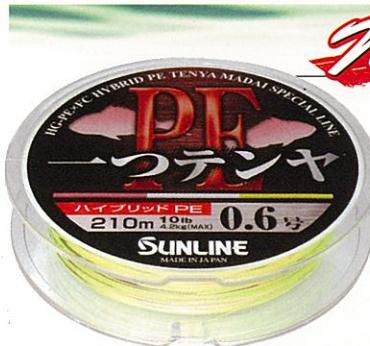

Hitotsu Tenya PE HG-PE type III

Tricolor rotation for truly practical application!

- An industry first!! Fluoro core PE braid!
- Completely new line design: High specific gravity fluorocarbon core, sheathed in high grade PE braid.
- High specific gravity (1.09) and circular profile for minimal tide interference. Easy to find the bottom, even with lightweight Tenya rigs.
- Just the right amount of tension for trouble-free line management. Lets you control your line at the best timing.
- Easy-to-see tricolor rotation
- Three colors that are easy to see, remember, and control, for stress-free line management.
- Lets you gauge depth and distance with markings at 1 meter intervals. Make the most of the slightest bite!



Length : 210m	●Color : Pink / White / Lemon Yellow in approx. 10m intervals			
Strength(lb)	10	11	12	16
Line Size(#)	0.6	0.7	0.8	1

Saltwater Special PE-EGI MS HG-PE type II

High grade polyethylene composite 8-strand braid.
Strong! High specific gravity! Cast farther! Go deeper!



Shocking pink

Jasmine yellow

- Ultra-high-strength high grade polyethylene and high specific gravity ester monofilament in an 8-strand, specially processed braid.
- The slick surface lets you create highly perfect line systems. Guide friction is minimized for much quieter casting.
- Special hybrid production process for just the right amount of stiffness, coupled with high strength for improved casting distance and performance as well as reduced headaches such as tangling. Designed for high-level balance with exceptional improvement in durability and abrasion resistance.
- Medium sinking design (specific gravity 1.05) minimizes the effect of wind and tide on the line. More manageable compared to conventional polyethylene lines.
- Low stretch and ultra high sensitivity to convey every move of your rod directly to your Egi.
- A choice of shocking pink or jasmine yellow to offer the visibility that suits your situation.

Length : 120m	●Color : Shocking pink / Jasmine yellow				
Strength(lb)	10	12	16	20	25
Line Size(#)	0.6	0.8	1	1.2	1.5



Saltwater Special PE-EGI HG HG - PE



High grade PE Ultra high tech! Thin & strong for longer distances!

- Ultra high strength high grade PE for confidence, even with light pound weight lines. Exceptional manageability and casting performance.
- Special braided processing and fine-tuned line diameter design system for even better slickness and reduced guide friction, resulting in dramatically longer casting distances.
- Ultra high tech color marking system is multifunctional, letting you know your casting distance and water depth at a glance. The line gives you instant feedback of when you hit the bottom or when you get a strike.
- Unbelievably high sensitivity conveys the subtlest strike or change in bottom configuration. Every tiny movement you make is conveyed directly to your Egi.

Length : 120m	Strength(lb)	10	12	16	20	25
	Line Size(#)	0.4	0.6	0.8	1	1.2

Length : 180m	Strength(lb)	10	12	16	20	25
	Line Size(#)	0.4	0.6	0.8	1	1.2

Length : 240m	Strength(lb)	10	12	16	20	25
	Line Size(#)	0.4	0.6	0.8	1	1.2

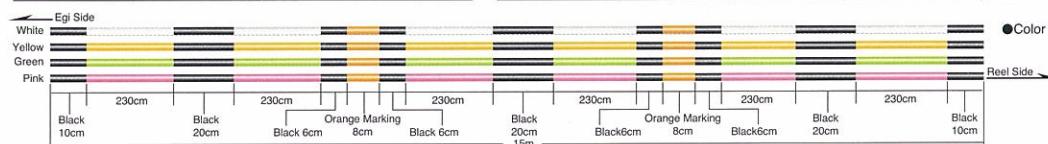

Saltwater Special CAST AWAY Monster Battle PE


High strength, high performance braided line for casting!

HG - PE

- High strength, high grade braided line for use when casting for tuna or yellowtail.
- Eight-strand braid plus special surface resin processing for reduced guide friction and significant improvement in manageability.
- A 2-meter black marking every 50 meters gives you pinpoint feedback of length and distance.

Length : 300m ● Color : Sky Blue

Strength(lb)	50	60	80	90	100	130
Line Size(#)	3	4	5	6	8	10



Length : 200m ● Color : Sky Blue

Strength(lb)	150
Line Size(#)	12



Saltwater Special CAST AWAY PE **HG-PE typeII**

I.G.F.A. rated high grade PE 8-carrier PE casting line!

Length : 150m ● Color : Pearl Blue


Strength(lb)	10	12	16	20	25	30	40	50
Line Size(#)	0.6	0.8	1	1.2	1.5	2	2.5	3

Length : 200m ● Color : Pearl Blue

Strength(lb)	30	40	50	60
Line Size(#)	2	2.5	3	4

Length : 300m ● Color : Pearl Blue

Strength(lb)	60	70	80
Line Size(#)	4	5	6

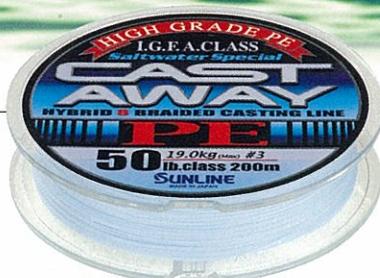

Super Cast PE NAGE II **Super PE**

High strength! High sensitivity! Super braid for surf casting!

- Made with high molecular weight polyethylene "Super PE" for outstanding strength and sensitivity.
- New surface resin processing technology for better slickness, reduced guide friction, and even better castability and durability.
- With our new, special dyeing process, the line is now even more vivid and visible in actual angling situations, and resists fading after use.



Length : 200m ● Color Pattern: White / Pink / Yellow / Blue


Strength(lb)	12	16	20	25	30	50
Line Size(#)	0.8	1	1.2	1.5	2	3



Super Cast PE NAGE Tapered Line II **Super PE**

Super awesome braid tapered leader!

- Special manufacturing method for a smooth, tapered configuration which minimizes guide friction for stress-free casting over longer distances.
- A choice of a highly visible red color and an outstandingly camouflaging black color.
- Use with PE NAGE series for even higher sensitivity in your surf casting.



Length : 13m single spool ● Color : Red, Black

Strength(lb)	10 - 70	12 - 70	16 - 70	20 - 75
Line Size(#)	0.8 - 6	1 - 6	1.5 - 6	2 - 7

Length : 39m(13m×3) ● Color : Red, Black

Strength(lb)	10 - 70	12 - 70	16 - 70	20 - 75
Line Size(#)	0.8 - 6	1 - 6	1.5 - 6	2 - 7



Super Cast PE NAGE Chikara Ito II **Super PE**

High strength braid leader!

- The best match with the PE NAGE series mainline.
- The straight configuration gives you high cost performance.
- Minimal loss of strength due to seawater, and much less fading compared to previous models.
- Green color blends well with seawater or sea plants.

Length : 39m(13m×3) ● Color : Dark Green

Strength(lb)	35	50	60	70
Line Size(#)	3	4	5	6





Length : 100m connected spools

Strength(lb)	35	40	50	60	80	90	100	130
Line Size(#)	2	2.5	3	4	5	6	8	10

PE JIGGER 8HG & PE JIGGER LIGHT SPECIAL
EMCS (Easy Measuring Color System) III (pat. pend.) color pattern**Saltwater Special PE JIGGER 8 HG HG - PE****The strongest eight-carrier braid: EMCSIII for unbelievably easier jigging!**


- Now 20% stronger, ultra high strength line with eight-carrier braiding of high grade PE. Lets you respond even more aggressively – now you can call all the shots when you fight the fish.
- Special finish produces a smooth surface, reducing screeching of the line when jerking.
- Minimal guide friction for fast fall rate. Unique tight braid design makes the line virtually impervious to surface damage.
- The further evolution of ultra high sensitivity and simple, high performance color pattern EMCSII make for easy feedback of water depth and bite depth.
- Gives you instant and precise detection of the most delicate hits on your falling lure or bait.

Length : 200m single spools

Strength(lb)	35	40	50
Line Size(#)	2	2.5	3

Length : 300m single spools

Strength(lb)	35	40	50	60
Line Size(#)	2	2.5	3	4

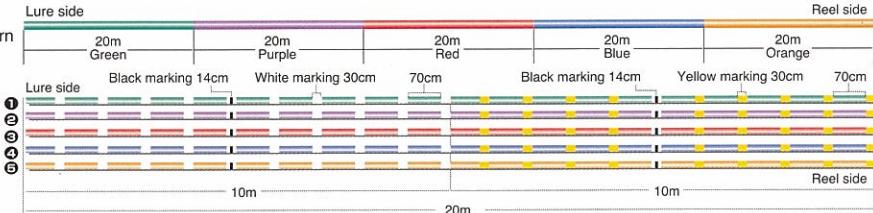● Color Pattern :
Green / Purple / Red / Blue / Orange**Saltwater Special PE JIGGER HG LIGHT SPECIAL****High grade PE light jigging line!****HG - PE**

- Ultra high strength, high grade PE in a four-carrier polyethylene braid.
- Ultra high strength, over 20% stronger than conventional Super PE lines.
- High performance, ultra high sensitivity yet rugged line designed for real action. Ideal for delicate presentation and tough fighting.
- Simple, easy-to-understand, exclusive EMCSIII (pat. pend.) color pattern gives you at-a-glance feedback on water depth and hit point.
- Short pitch braiding technology for improved durability and consistent strength. Stable cast control for long-distance casting too.
- Special surface finish reduces guide friction for smooth, stress-free light jigging.
- We recommend the SF knot or FG knot to attach your leader to the line.

Length : 200m ● Color Pattern : Green / Purple / Red / Blue / Orange

Strength(lb)	10	12	16	20	25
Line Size(#)	0.6	0.8	1	1.2	1.5

**DEEP ONE 8HG HG - PE****8-Strand High Grade Braided Line!**

- High-grade polyethylene in an 8-strand braid design. The Deep One has evolved still further.
- An all-round, versatile, yet high-performance line for all situations including light jigging.
- Approx. 20% stronger than our existing product.
- 8-strand braid design for a smooth line surface, dramatically reducing rod guide noise and splashing for a cut above in manageability.
- High visibility and good depth indication by a solid line color change every 10 meters, with each color section more finely demarcated every meter.


● Color Pattern : Red / purple / blue / pink / orange

Length : 100m connected spools

Strength(lb)	10	12	16	20	25	35	40	50
Line Size(#)	0.6	0.8	1	1.2	1.5	2	2.5	3

Length : 200m single spool

Strength(lb)	10	12	16	20	25	35	40	50
Line Size(#)	0.6	0.8	1	1.2	1.5	2	2.5	3

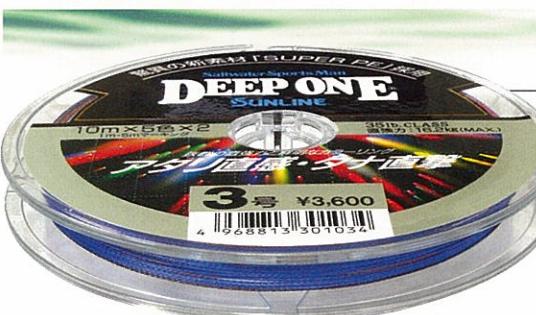**DEEP ONE Super PE****Super braided line with No. 1 track record!**

- Our original special coating produces vivid colors which stay bright after repeated and prolonged exposure to seawater.
- Enhanced durability with minimal line fatigue and premature breakage.
- Versatile line for a wide range of uses, from bottom fishing to deep jigging.
- Ultra high strength, ultra high sensitivity. Powerful, yet lets you feel the strike with incredible precision.
- Made with ultra high molecular weight polyethylene super PE.

● Color Pattern : Blue / Yellow / Red / Green / Brown

10m	10m	10m	10m	10m
Blue	Yellow	Red	Green	Brown

Length : 50m connected spools

Strength(lb)	170	220
Line Size(#)	20	30

Length : 100m single spool

Strength(lb)	12	16	20	30	35
Line Size(#)	1	1.5	2	2.5	3

Length : 100m connected spools

Strength(lb)	12	16	20	30	35	50
Line Size(#)	1	1.5	2	2.5	3	4



Fluo. Yellow

SUNLINE MOMENTUM 4x4 HG-PE type II

Your wish is its command! Unbelievably versatile, new concept 4 X 4 structure braided line!

- High grade polyethylene and high specific gravity ester monofilaments in a 4 x 4 structure for an amazing specific gravity of 1.05, making it less susceptible to the effect of wind and waves and better able to blend with the tide.
- Slick, smooth line surface for minimal guide friction and longer casting distance compared to 100% polyethylene.
- Just the right amount of stiffness and firmness for trouble-free handling on the guides
- Knots are easy to make and keep in place.
- The line is easy to cut cleanly, making it easy to pass through the eye of hook.
- Excellent abrasion resistance.
- Comes in two colors: Yellow for high visibility, or dark green for good camouflage. Applicable to a wide range of angling situations.

Length : 150m ● Color : Dark Green / Fluo.Yellow

Calculated Dia.(mm)	0.156	0.175	0.192	0.208	0.260	0.287	0.312
Strength(lb)	10	12	16	20	30	40	50
Line Size(#)	0.6	0.8	1	1.2	2	2.5	3

Length : 200m ● Color : Dark Green / Fluo.Yellow

Calculated Dia.(mm)	0.260	0.287	0.312	0.356
Strength(lb)	30	40	50	60
Line Size(#)	2	2.5	3	4

Length : 300m ● Color : Dark Green / Fluo.Yellow

Calculated Dia.(mm)	0.396	0.431
Strength(lb)	70	80
Line Size(#)	5	6



Dark Green



Light Green



White

Super PE Super PE

Sunline's original super high strength, super high sensitivity braided fishing line!

- Braided PE line is 2.5 times stronger than nylon.
- Low stretch (max. 5%) for ultra high sensitivity design – gives you instant feedback of the slightest bite and the lightest touch on the bottom. Lets you land more fish and experience fewer problems. Improves your lure's response, even in aggressive situations.
- Super high strength means you can use a thinner diameter than you normally would. The low specific gravity (0.97) makes long-distance casting easy and improves control. Tight braiding for enhanced durability. Smooth surface texture for stress-free line control.
- Special surface finish for reduced guide friction, less jerking noise, and enhanced durability.
- Hydrophobic and weather resistant. Extremely resistant to degradation. Remains dependable over long periods of use.

Length : 150m / 300m ● Color : White / Light Green / Dark Green

Strength(lb)	6	8	10	15	20	25	30	40	50	60	80
Line Size(#)	0.6	0.8	1	1.5	2	2.5	3	4	5	6	8